



6FM1.9/12Volt 1.9Ah

General Series Battery

General Series VRLA batteries are designed with AGM(Absorbent Glass Mat) technology, High performance plates and electrolyte to give extra power output for common power backup system. General Series Batteries are the general purpose batteries with 5 years floating design life at 25 C.



Application

- ☆ Emergency Power System
- ☆ Communication equipment
- ☆ Telecommunication systems
- ☆ Uninterruptible power supplies
- ☆ Electric toy car and wheelchairs, etc
- ☆ Power tools
- ☆ Alarm system
- ☆ Marine equipment
- ☆ Medical equipment
- ☆ Fire and Security System

General Features

- ☆ Heavy Duty Grid
- ☆ Mechanized assembly
- ☆ Non-spillable construction
- ☆ High Reliability and Stability
- ☆ Sealed and Maintenance-free
- ☆ Long Life and low self-discharge design


Construction

- ☆ Positive.....Lead dioxide
- ☆ Electrolyte.....Sulfuric acid
- ☆ Separator.....Fiber glass
- ☆ Container.....ABS(UL94-HB) / Flame Retardant ABS (UL94-V0)
- ☆ Negative.....Lead
- ☆ Safety Valve.....EPDR
- ☆ Terminal.....Copper


Specification

Battery Model	Nominal Voltage		12V	
	Rated capacity (20Hour rate)		1.9Ah	
	Cells Per battery		6	
Dimension	Length	Width	Height	Total Height
	178mm	34mm	60mm	66mm
Approx Weight	0.86Kg			
Internal Resistance	Full charged at 25°C (77°F): Approx 50mΩ			
Max.discharge current	28.5A(5s)			
Floating design life @ 25°C (77°F)	5 years			
Capacity @ 25°C (77°F)	20Hour rate(0.095A/10.5V)	10Hour rate(0.17A/10.5V)	5Hour rate(0.30A/10.5V)	1Hour rate(1.14A/10.5V)
	1.9Ah	1.71Ah	1.53Ah	1.14Ah
Capacity affected by Temp(20 HR)	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C(5°F)
	102%	100%	85%	65%
Self Discharge @ 25°C (77°F)	After 3 months storage		After 6 months storage	
	91%		82%	
	After 12 months storage			
Charge method @ 25°C (77°F)	Cycle Use		14.5-14.9V (Initial charging current less than 0.57 A)	
	Float Use		13.6-13.8V	

Outer dimension (mm)

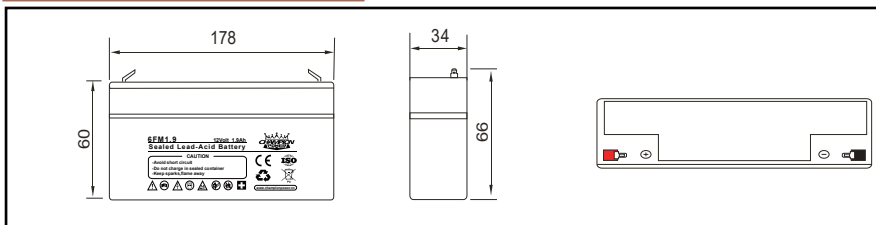

Terminal Type (mm)



Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C (77°F)

F.V / TIME	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h	
9.60V	A	6.89	5.36	3.93	2.25	1.25	0.77	0.58	0.47	0.33	0.22	0.18	0.10
	W	72.99	56.92	42.00	24.30	13.63	8.35	6.33	5.13	3.67	2.44	2.00	1.09
10.20V	A	6.26	4.69	3.52	2.05	1.18	0.71	0.54	0.44	0.33	0.22	0.18	0.10
	W	68.28	52.09	39.19	23.09	13.25	8.07	6.14	5.00	3.71	2.46	2.00	1.09
10.50V	A	5.76	4.27	3.27	1.99	1.14	0.69	0.53	0.43	0.32	0.21	0.17	0.10
	W	63.34	48.07	36.93	22.69	13.00	7.92	6.03	4.94	3.71	2.46	2.01	1.09
10.80V	A	5.24	3.88	3.02	1.90	1.10	0.67	0.51	0.42	0.31	0.21	0.17	0.09
	W	57.66	44.21	34.59	21.94	12.73	7.70	5.93	4.85	3.60	2.43	1.98	1.08
11.10V	A	4.53	3.57	2.45	1.77	1.05	0.59	0.45	0.35	0.30	0.20	0.17	0.09
	W	51.23	41.28	28.37	20.69	12.23	6.95	5.25	4.11	3.48	2.39	1.96	1.06

Note: The above datas are average values. (Edition 2017-11)



6FM1.9/12Volt 1.9Ah

