

## OPzV2-1200

2Volt 1200Ah

### OPzV Series Battery


OPzV series adopts an Immobilized Gel and Tubular Positive Plate technology. It offers high reliability and stable performance. By using die-casted positive grid and patented active material formula, it exceeds the DIN standard values and offer 25+ years design life in float service. It is very suitable for cyclic use under extreme operating conditions. This series is recommended for telecom outdoor applications, solar system and other harsh environment applications.

### Specification

Battery Model	Nominal Voltage	2V		
	Rated Capacity (10Hour rate)	1200Ah		
Floating Design Life @ 20°C	25+ years			
Dimension	Length	Width	Height	Total Height
	275mm	210mm	647mm	688mm
Approx Weight	87.0Kg			
Internal Resistance	Full charged at 20°C (77°F): Approx 0.31mΩ			
Max.Charge Current	240A			
Max.Discharge Current	2500A(5s)			
Short Circuit Current	6400A			
Self Discharge	Approx. 2% per month @20°C			
Ambient Temperature	Discharge	-40~65°C		
	Charge	-30~65°C		
	Storage	-25~40°C		
Float Charge Voltage(20~25°C)	2.25~2.29V (-3mV/°C/cell)			
Equalize Charge Voltage(20~25°C)	2.35~2.40V(-5mV/°C/cell)			
Terminal Type	Female copper insert M8 (torque:10~12N.m)			
Container Material	ABS (UL94-V0 optional)			

### Outer dimension (mm)

### Terminal Type (mm)

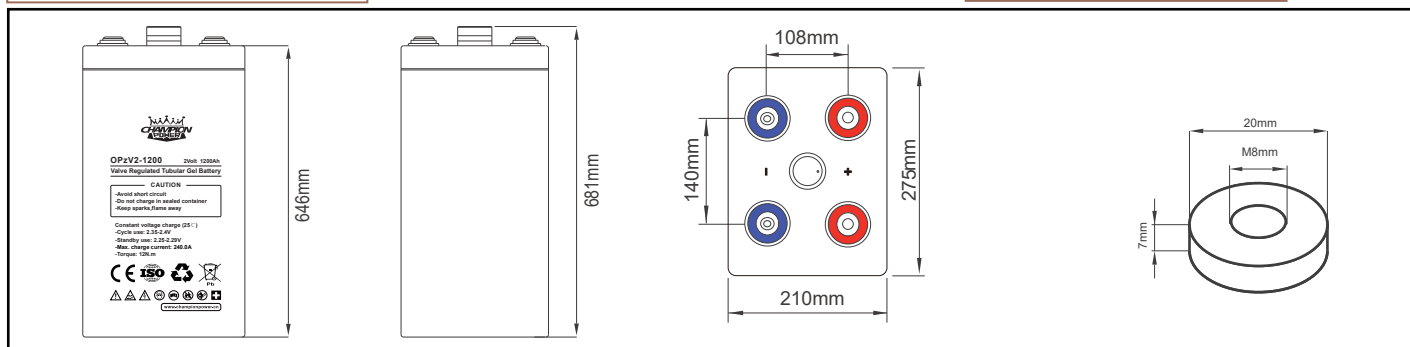

### Constant Current Discharge Characteristics:Amps 20°C

F.V/Time	10min	15min	30min	1h	2h	3h	5h	8h	10h
1.90V	429	417	390	328	280	235	174	125	103
1.87V	585	546	484	382	314	259	189	132	109
1.85V	673	616	530	417	346	279	201	138	113
1.83V	784	686	573	460	369	294	206	143	115
1.80V	877	796	642	507	389	309	210	145	120
1.75V	930	874	753	552	407	318	214	147	121
1.70V	1012	959	827	583	422	323	218	149	123
1.65V	1182	1080	901	620	434	329	222	152	126
1.60V	1287	1186	956	640	443	335	227	155	128

### Long Time Dscharge Capacity

Capacity (Ah)	C <sub>10</sub>	C <sub>20</sub>	C <sub>24</sub>	C <sub>48</sub>	C <sub>72</sub>	C <sub>100</sub>	C <sub>120</sub>	C <sub>240</sub>
	1200	1302	1356	1464	1512	1532	1548	1592
Final Voltage	1.80V		1.85V					

### Parameters Settings

Over voltage disconnect	2.45±0.01V/cell @ 20~25°C
Regulation/equalize voltage	2.40±0.01V/cell @ 20~25°C
Array roconnection voltage	2.25±0.005V/cell @ 20~25°C
Float voltage setting	2.27±0.005V/cell @ 20~25°C
Low voltage alarm voltage	1.95±0.005V/cell @ 20~25°C
Low voltage disconnect	1.90±0.005V/cell @ 20~25°C
Load reconnect voltage	2.09±0.01V/cell @ 20~25°C
Temp. compensate coefficient	-5mV/cell/°C

### Constant Power Discharge Characteristics:W/caell 20°C

F.V/Time	10min	15min	30min	1h	2h	3h	5h	8h	10h
1.90V	829	808	759	643	554	468	349	251	208
1.87V	1108	1038	927	738	613	510	375	264	218
1.85V	1257	1156	1003	797	668	543	395	274	225
1.83V	1447	1273	1071	869	705	568	400	280	227
1.80V	1597	1455	1184	946	736	589	404	281	229
1.75V	1665	1572	1369	1015	757	596	406	282	233
1.70V	1787	1703	1483	1058	777	601	409	284	236
1.65V	2050	1887	1592	1110	790	605	413	285	238
1.60V	2188	2030	1656	1126	794	606	417	288	240



## OPzV2-1200 2Volt 1200Ah

